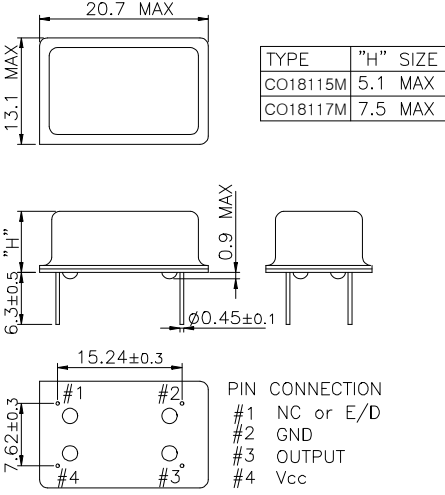


Excequal

Clock Oscillator

CO1811

6MHz ~ 190MHz
SINEWAVE 50 ohm

MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																										
	<table border="1"> <tr> <td>Frequency range</td> <td colspan="2">6.000MHz to 190.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory</td> </tr> <tr> <td>Frequency Stability vs. Temperature vs. Aging</td> <td colspan="2">± 10 ppm to ±50ppm ±3.0 ppm max/ year</td> </tr> <tr> <td>Temperature Range Operating Storage</td> <td colspan="2">See Table 2 -55°C to 105°C</td> </tr> <tr> <td>Supply Voltage</td> <td colspan="2">3.3V ± 5% 5.0V ± 5%</td> </tr> <tr> <td>Input Current</td> <td colspan="2"> <table border="1"> <tr> <td></td> <td>3.3V</td> <td>5.0V</td> </tr> <tr> <td>fo ≤ 25.000MHz</td> <td>15mA</td> <td>20mA</td> </tr> <tr> <td>fo ≤ 50.000MHz</td> <td>25mA</td> <td>30mA</td> </tr> <tr> <td>fo ≤ 80.000MHz</td> <td>35mA</td> <td>50mA</td> </tr> <tr> <td>fo ≤ 125.000MHz</td> <td>40mA</td> <td>60mA</td> </tr> <tr> <td>fo ≤ 190.000MHz</td> <td>45mA</td> <td>70mA</td> </tr> </table> </td> </tr> <tr> <td>Output characteristics</td> <td colspan="2"> <table border="1"> <tr> <td></td> <td colspan="2">Sinewave</td> </tr> <tr> <td>Level</td> <td>3.3V</td> <td>0 dBm typ</td> </tr> <tr> <td></td> <td>5.0V</td> <td>10 dBm typ</td> </tr> <tr> <td>Load</td> <td colspan="2">50Ω</td> </tr> </table> </td> </tr> <tr> <td>Pin 1 Tri-State Input Voltage</td> <td colspan="2"> <table border="1"> <tr> <td>No Connection</td> <td>Disable Output</td> </tr> <tr> <td>Vh ≥ 2.0 Vdc</td> <td>Enable Output</td> </tr> <tr> <td>VI ≤ 0.8 Vdc</td> <td>Disable Output</td> </tr> </table> </td> </tr> </table>		Frequency range	6.000MHz to 190.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory		Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year		Temperature Range Operating Storage	See Table 2 -55°C to 105°C		Supply Voltage	3.3V ± 5% 5.0V ± 5%		Input Current	<table border="1"> <tr> <td></td> <td>3.3V</td> <td>5.0V</td> </tr> <tr> <td>fo ≤ 25.000MHz</td> <td>15mA</td> <td>20mA</td> </tr> <tr> <td>fo ≤ 50.000MHz</td> <td>25mA</td> <td>30mA</td> </tr> <tr> <td>fo ≤ 80.000MHz</td> <td>35mA</td> <td>50mA</td> </tr> <tr> <td>fo ≤ 125.000MHz</td> <td>40mA</td> <td>60mA</td> </tr> <tr> <td>fo ≤ 190.000MHz</td> <td>45mA</td> <td>70mA</td> </tr> </table>			3.3V	5.0V	fo ≤ 25.000MHz	15mA	20mA	fo ≤ 50.000MHz	25mA	30mA	fo ≤ 80.000MHz	35mA	50mA	fo ≤ 125.000MHz	40mA	60mA	fo ≤ 190.000MHz	45mA	70mA	Output characteristics	<table border="1"> <tr> <td></td> <td colspan="2">Sinewave</td> </tr> <tr> <td>Level</td> <td>3.3V</td> <td>0 dBm typ</td> </tr> <tr> <td></td> <td>5.0V</td> <td>10 dBm typ</td> </tr> <tr> <td>Load</td> <td colspan="2">50Ω</td> </tr> </table>			Sinewave		Level	3.3V	0 dBm typ		5.0V	10 dBm typ	Load	50Ω		Pin 1 Tri-State Input Voltage	<table border="1"> <tr> <td>No Connection</td> <td>Disable Output</td> </tr> <tr> <td>Vh ≥ 2.0 Vdc</td> <td>Enable Output</td> </tr> <tr> <td>VI ≤ 0.8 Vdc</td> <td>Disable Output</td> </tr> </table>		No Connection	Disable Output	Vh ≥ 2.0 Vdc	Enable Output	VI ≤ 0.8 Vdc	Disable Output
Frequency range	6.000MHz to 190.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory																																																										
Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year																																																										
Temperature Range Operating Storage	See Table 2 -55°C to 105°C																																																										
Supply Voltage	3.3V ± 5% 5.0V ± 5%																																																										
Input Current	<table border="1"> <tr> <td></td> <td>3.3V</td> <td>5.0V</td> </tr> <tr> <td>fo ≤ 25.000MHz</td> <td>15mA</td> <td>20mA</td> </tr> <tr> <td>fo ≤ 50.000MHz</td> <td>25mA</td> <td>30mA</td> </tr> <tr> <td>fo ≤ 80.000MHz</td> <td>35mA</td> <td>50mA</td> </tr> <tr> <td>fo ≤ 125.000MHz</td> <td>40mA</td> <td>60mA</td> </tr> <tr> <td>fo ≤ 190.000MHz</td> <td>45mA</td> <td>70mA</td> </tr> </table>			3.3V	5.0V	fo ≤ 25.000MHz	15mA	20mA	fo ≤ 50.000MHz	25mA	30mA	fo ≤ 80.000MHz	35mA	50mA	fo ≤ 125.000MHz	40mA	60mA	fo ≤ 190.000MHz	45mA	70mA																																							
	3.3V	5.0V																																																									
fo ≤ 25.000MHz	15mA	20mA																																																									
fo ≤ 50.000MHz	25mA	30mA																																																									
fo ≤ 80.000MHz	35mA	50mA																																																									
fo ≤ 125.000MHz	40mA	60mA																																																									
fo ≤ 190.000MHz	45mA	70mA																																																									
Output characteristics	<table border="1"> <tr> <td></td> <td colspan="2">Sinewave</td> </tr> <tr> <td>Level</td> <td>3.3V</td> <td>0 dBm typ</td> </tr> <tr> <td></td> <td>5.0V</td> <td>10 dBm typ</td> </tr> <tr> <td>Load</td> <td colspan="2">50Ω</td> </tr> </table>			Sinewave		Level	3.3V	0 dBm typ		5.0V	10 dBm typ	Load	50Ω																																														
	Sinewave																																																										
Level	3.3V	0 dBm typ																																																									
	5.0V	10 dBm typ																																																									
Load	50Ω																																																										
Pin 1 Tri-State Input Voltage	<table border="1"> <tr> <td>No Connection</td> <td>Disable Output</td> </tr> <tr> <td>Vh ≥ 2.0 Vdc</td> <td>Enable Output</td> </tr> <tr> <td>VI ≤ 0.8 Vdc</td> <td>Disable Output</td> </tr> </table>		No Connection	Disable Output	Vh ≥ 2.0 Vdc	Enable Output	VI ≤ 0.8 Vdc	Disable Output																																																			
No Connection	Disable Output																																																										
Vh ≥ 2.0 Vdc	Enable Output																																																										
VI ≤ 0.8 Vdc	Disable Output																																																										

| OUTPUT WAVEFORM | ENVIROMENTAL & MECHANICAL SPECIFICATION | | | |----------------|---| | Shock | MIL-STD-883C, Method 2002, Condition B | | Vibration | MIL-STD-883C, Method 2007, Condition A | | Solderability | MIL-STD-883C, Method 2003 | | Seal integrity | MIL-STD-883C, Method 1014, Condition C & A2 | | Marking | MIL-STD-202F, Method 215 | | |
| TEST CIRCUIT | | TABLE1 | | TABLE2 | | | | |--------|-----------|--------|-------|--------|-------| | Symbol | Stability | Symbol | Temp. | Symbol | Temp. | | 10 | ± 10ppm | 0 | 0°C | A | 50°C | | 15 | ± 15ppm | 1 | -10°C | B | 60°C | | 20 | ± 20ppm | 2 | -20°C | C | 70°C | | 30 | ± 30ppm | 3 | -30°C | D | 75°C | | 50 | ± 50ppm | 4 | -40°C | E | 80°C | | 100 | ±100ppm | | | F | 85°C | | |