

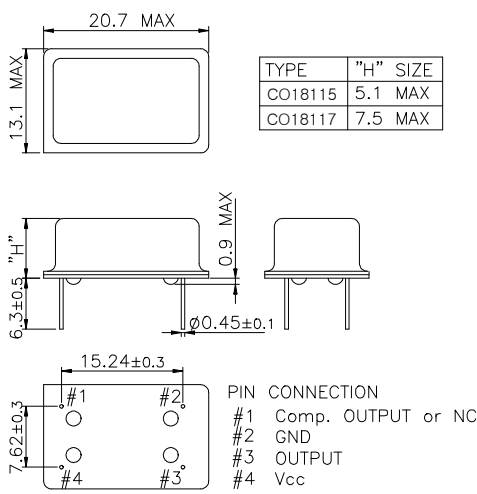
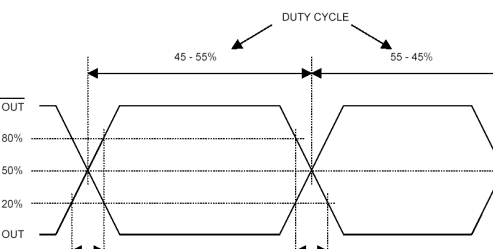


Excequal

Clock Oscillator

CO1811

0.75MHz ~ 800MHz

PECL or LVDS 50 ohm TO Vcc-2.0V or 100 ohm differential

MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																											
	<table border="1"> <tr> <td>Frequency range</td> <td>0.75MHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory</td> </tr> </table>		Frequency range	0.75MHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory																																								
Frequency range	0.75MHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory																																											
	<table border="1"> <tr> <td>Frequency Stability vs. Temperature vs. Aging</td> <td>± 10 ppm to ±50ppm ±3.0 ppm max/ year</td> </tr> <tr> <td>Temperature Range Operating Storage</td> <td>See Table 2 -55°C to 105°C</td> </tr> <tr> <td>Supply Voltage</td> <td>3.3V ± 5% 5.0V ± 5%</td> </tr> <tr> <td>Input Current 3.3 V , 5V</td> <td>24.000MHz ~ 800.000MHz 25mA max ~ 100mA max</td> </tr> </table>		Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year	Temperature Range Operating Storage	See Table 2 -55°C to 105°C	Supply Voltage	3.3V ± 5% 5.0V ± 5%	Input Current 3.3 V , 5V	24.000MHz ~ 800.000MHz 25mA max ~ 100mA max																																		
Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year																																											
Temperature Range Operating Storage	See Table 2 -55°C to 105°C																																											
Supply Voltage	3.3V ± 5% 5.0V ± 5%																																											
Input Current 3.3 V , 5V	24.000MHz ~ 800.000MHz 25mA max ~ 100mA max																																											
<p>OUTPUT WAVEFORM</p>	<table border="1"> <tr> <td rowspan="8">Output characteristics</td> <td></td> <td>pecl</td> <td>lvds</td> </tr> <tr> <td>Voh Logic "1"</td> <td>Vdd-1.025v min.</td> <td>1.43v typ.</td> </tr> <tr> <td>Vol Logic "0"</td> <td>Vdd-1.620v max.</td> <td>1.10v typ.</td> </tr> <tr> <td>Rise Time Tr</td> <td>1.0 nsec max.</td> <td>1.0 nsec max.</td> </tr> <tr> <td>Fall Time Tf</td> <td>1.0 nsec min.</td> <td>1.0 nsec min.</td> </tr> <tr> <td>Duty Cycle</td> <td>50//50 ± 5%</td> <td>50//50 ± 5%</td> </tr> <tr> <td>Differential Output</td> <td>Vod(Lvds)</td> <td>330mV typ.</td> </tr> <tr> <td>Offset Voltage</td> <td>Vos(Lvds)</td> <td>1.2V typ</td> </tr> </table>		Output characteristics		pecl	lvds	Voh Logic "1"	Vdd-1.025v min.	1.43v typ.	Vol Logic "0"	Vdd-1.620v max.	1.10v typ.	Rise Time Tr	1.0 nsec max.	1.0 nsec max.	Fall Time Tf	1.0 nsec min.	1.0 nsec min.	Duty Cycle	50//50 ± 5%	50//50 ± 5%	Differential Output	Vod(Lvds)	330mV typ.	Offset Voltage	Vos(Lvds)	1.2V typ																	
Output characteristics		pecl		lvds																																								
	Voh Logic "1"	Vdd-1.025v min.		1.43v typ.																																								
	Vol Logic "0"	Vdd-1.620v max.		1.10v typ.																																								
	Rise Time Tr	1.0 nsec max.		1.0 nsec max.																																								
	Fall Time Tf	1.0 nsec min.		1.0 nsec min.																																								
	Duty Cycle	50//50 ± 5%		50//50 ± 5%																																								
	Differential Output	Vod(Lvds)		330mV typ.																																								
	Offset Voltage	Vos(Lvds)	1.2V typ																																									
<p>TEST CIRCUIT</p>  	<table border="1"> <tr> <td>JITTER (RMS)</td> <td>Phase Jitter (12KHz ~ 20MHz)</td> <td>1.0 psec MAX</td> </tr> </table>		JITTER (RMS)	Phase Jitter (12KHz ~ 20MHz)	1.0 psec MAX																																							
JITTER (RMS)	Phase Jitter (12KHz ~ 20MHz)	1.0 psec MAX																																										
<p>TEST CIRCUIT</p>	<table border="1"> <tr> <td>Pin 1 Tri-State Input Voltage</td> <td>No Connection Vh ≥ 2.0 Vdc Vi ≤ 0.8 Vdc</td> <td>Disable Output Disable Output Enable Output</td> </tr> </table>		Pin 1 Tri-State Input Voltage	No Connection Vh ≥ 2.0 Vdc Vi ≤ 0.8 Vdc	Disable Output Disable Output Enable Output																																							
Pin 1 Tri-State Input Voltage	No Connection Vh ≥ 2.0 Vdc Vi ≤ 0.8 Vdc	Disable Output Disable Output Enable Output																																										
<p>ENVIROMENTAL & MECHANICAL SPECIFICATION</p>																																												
<p>Shock Vibration Solderability Seal integrity Marking</p>		<p>MIL-STD-883C, Method 2002, Condition B MIL-STD-883C, Method 2007, Condition A MIL-STD-883C, Method 2003 MIL-STD-883C, Method 1014, Condition C & A2 MIL-STD-202F, Method 215</p>																																										
<p>TABLE1</p> <table border="1"> <tr> <th>Symbol</th> <th>Stability</th> </tr> <tr> <td>10</td> <td>± 10ppm</td> </tr> <tr> <td>15</td> <td>± 15ppm</td> </tr> <tr> <td>20</td> <td>± 20ppm</td> </tr> <tr> <td>30</td> <td>± 30ppm</td> </tr> <tr> <td>50</td> <td>± 50ppm</td> </tr> <tr> <td>100</td> <td>±100ppm</td> </tr> </table>		Symbol	Stability	10	± 10ppm	15	± 15ppm	20	± 20ppm	30	± 30ppm	50	± 50ppm	100	±100ppm	<p>TABLE2</p> <table border="1"> <tr> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> <tr> <td>0</td> <td>0°C</td> <td>A</td> <td>50°C</td> </tr> <tr> <td>1</td> <td>-10°C</td> <td>B</td> <td>60°C</td> </tr> <tr> <td>2</td> <td>-20°C</td> <td>C</td> <td>70°C</td> </tr> <tr> <td>3</td> <td>-30°C</td> <td>D</td> <td>75°C</td> </tr> <tr> <td>4</td> <td>-40°C</td> <td>E</td> <td>80°C</td> </tr> <tr> <td></td> <td></td> <td>F</td> <td>85°C</td> </tr> </table>	Symbol	Temp.	Symbol	Temp.	0	0°C	A	50°C	1	-10°C	B	60°C	2	-20°C	C	70°C	3	-30°C	D	75°C	4	-40°C	E	80°C			F	85°C
Symbol	Stability																																											
10	± 10ppm																																											
15	± 15ppm																																											
20	± 20ppm																																											
30	± 30ppm																																											
50	± 50ppm																																											
100	±100ppm																																											
Symbol	Temp.	Symbol	Temp.																																									
0	0°C	A	50°C																																									
1	-10°C	B	60°C																																									
2	-20°C	C	70°C																																									
3	-30°C	D	75°C																																									
4	-40°C	E	80°C																																									
		F	85°C																																									