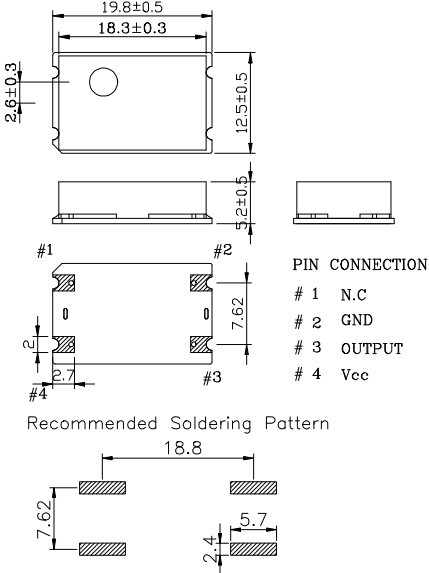
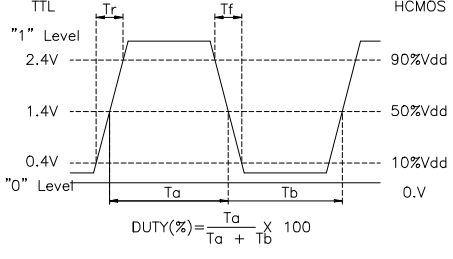
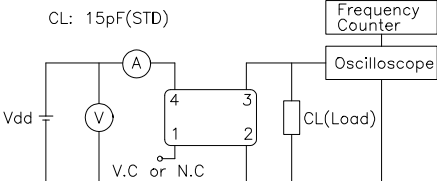


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																															
 <p>PIN CONNECTION</p> <ul style="list-style-type: none"> # 1 N.C # 2 GND # 3 OUTPUT # 4 Vcc <p>Recommended Soldering Pattern</p>	<p>Frequency range</p> <p>1.000KHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory.</p>																																															
	<p>Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging</p> <p>±0.5 ppm to ±5.0ppm ±0.1 / ±0.3 ppm max / Vdd ± 5% ±0.2 ppm max /15pF ±10% ±1.0 ppm max/ year</p>																																															
	<p>Temperature Range Operating Storage</p> <p>See Table 2 -55℃ to 125℃</p>																																															
	<p>Supply Voltage</p> <p>3.3V ± 5% 5.0V ± 5%</p>																																															
	<p>Input Current 3.3 V , 5V</p> <p>1.000KHz ~ 40.000MHz ~ 800.000MHz 15mA max ~ 30mA max ~ 50mA max</p>																																															
<p>OUTPUT WAVEFORM</p> 	<p>Output characteristics</p> <table border="1"> <thead> <tr> <th></th> <th>HCMOS</th> <th>TTL</th> </tr> </thead> <tbody> <tr> <td>Logic "1"</td> <td>90% Vdd min</td> <td>2.4V min</td> </tr> <tr> <td>Logic "0"</td> <td>10% Vdd max</td> <td>0.4V min</td> </tr> <tr> <td>Load</td> <td>15pF</td> <td>10TTL</td> </tr> <tr> <td>Duty Cycle</td> <td>40/60</td> <td>40/60</td> </tr> <tr> <td>Rise & Fall</td> <td>10nS max</td> <td>10nS max</td> </tr> </tbody> </table>			HCMOS	TTL	Logic "1"	90% Vdd min	2.4V min	Logic "0"	10% Vdd max	0.4V min	Load	15pF	10TTL	Duty Cycle	40/60	40/60	Rise & Fall	10nS max	10nS max																												
	HCMOS	TTL																																														
Logic "1"	90% Vdd min	2.4V min																																														
Logic "0"	10% Vdd max	0.4V min																																														
Load	15pF	10TTL																																														
Duty Cycle	40/60	40/60																																														
Rise & Fall	10nS max	10nS max																																														
	<p>Phase Noise (typical) 20MHz offset</p> <p>-80 dBc / Hz @ 10Hz -120 dBc / Hz @ 100Hz -135 dBc / Hz @ 1KHz -140 dBc / Hz @ 10KHz -145 dBc / Hz @100KHz</p>																																															
	<p>Frequency Adjustment ±3ppm min by internal trimmer</p>																																															
<p>TEST CIRCUIT</p> 	<p>ENVIROMENTAL & MECHANICAL SPECIFICATION</p>																																															
	<table border="1"> <tbody> <tr> <td>Shock</td> <td>MIL-STD-883C, Method 2002, Condition B</td> </tr> <tr> <td>Vibration</td> <td>MIL-STD-883C, Method 2007, Condition A</td> </tr> <tr> <td>Solderability</td> <td>MIL-STD-883C, Method 2003</td> </tr> <tr> <td>Seal integrity</td> <td>MIL-STD-883C, Method 1014, Condition C & A2</td> </tr> <tr> <td>Marking</td> <td>MIL-STD-202F, Method 215</td> </tr> </tbody> </table>		Shock	MIL-STD-883C, Method 2002, Condition B	Vibration	MIL-STD-883C, Method 2007, Condition A	Solderability	MIL-STD-883C, Method 2003	Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2	Marking	MIL-STD-202F, Method 215																																				
Shock	MIL-STD-883C, Method 2002, Condition B																																															
Vibration	MIL-STD-883C, Method 2007, Condition A																																															
Solderability	MIL-STD-883C, Method 2003																																															
Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2																																															
Marking	MIL-STD-202F, Method 215																																															
	<p>TABLE1</p> <table border="1"> <thead> <tr> <th>Symbol</th> <th>Stability</th> </tr> </thead> <tbody> <tr><td>05</td><td>±0.5ppm</td></tr> <tr><td>10</td><td>±1.0ppm</td></tr> <tr><td>15</td><td>±1.5ppm</td></tr> <tr><td>20</td><td>±2.0ppm</td></tr> <tr><td>25</td><td>±2.5ppm</td></tr> <tr><td>30</td><td>±3.0ppm</td></tr> <tr><td>35</td><td>±3.5ppm</td></tr> <tr><td>50</td><td>±5.0ppm</td></tr> </tbody> </table>	Symbol	Stability	05	±0.5ppm	10	±1.0ppm	15	±1.5ppm	20	±2.0ppm	25	±2.5ppm	30	±3.0ppm	35	±3.5ppm	50	±5.0ppm	<p>TABLE2</p> <table border="1"> <thead> <tr> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> </thead> <tbody> <tr><td>0</td><td>0℃</td><td>A</td><td>50℃</td></tr> <tr><td>1</td><td>-10℃</td><td>B</td><td>60℃</td></tr> <tr><td>2</td><td>-20℃</td><td>C</td><td>70℃</td></tr> <tr><td>3</td><td>-30℃</td><td>D</td><td>75℃</td></tr> <tr><td>4</td><td>-40℃</td><td>E</td><td>80℃</td></tr> <tr><td></td><td></td><td>F</td><td>85℃</td></tr> </tbody> </table>	Symbol	Temp.	Symbol	Temp.	0	0℃	A	50℃	1	-10℃	B	60℃	2	-20℃	C	70℃	3	-30℃	D	75℃	4	-40℃	E	80℃			F	85℃
Symbol	Stability																																															
05	±0.5ppm																																															
10	±1.0ppm																																															
15	±1.5ppm																																															
20	±2.0ppm																																															
25	±2.5ppm																																															
30	±3.0ppm																																															
35	±3.5ppm																																															
50	±5.0ppm																																															
Symbol	Temp.	Symbol	Temp.																																													
0	0℃	A	50℃																																													
1	-10℃	B	60℃																																													
2	-20℃	C	70℃																																													
3	-30℃	D	75℃																																													
4	-40℃	E	80℃																																													
		F	85℃																																													