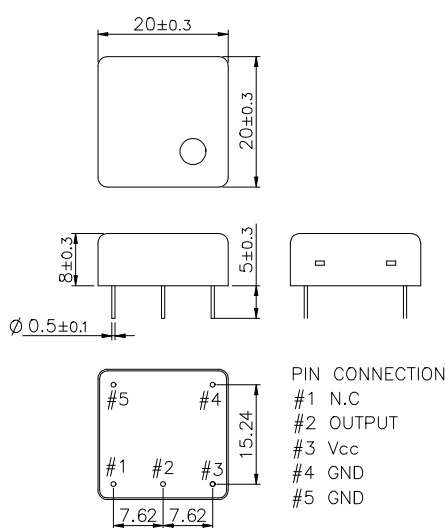
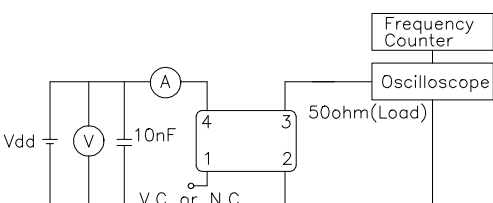


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																
 <p>PIN CONNECTION</p> <ul style="list-style-type: none"> #1 N.C #2 OUTPUT #3 Vcc #4 GND #5 GND 	<table border="1"> <tr> <td>Frequency range</td> <td colspan="2">1.8432MHz to 190.000MHz</td> </tr> </table>		Frequency range	1.8432MHz to 190.000MHz																																													
Frequency range	1.8432MHz to 190.000MHz																																																
	<table border="1"> <tr> <td>Frequency Stability</td> <td colspan="2">±0.5 ppm to ±5.0ppm</td> </tr> <tr> <td>vs. Temperature</td> <td colspan="2">±0.1 / ±0.2 ppm max / Vdd ± 5%</td> </tr> <tr> <td>vs. Supply Voltage</td> <td colspan="2">±0.2 ppm max / 15pF ±10%</td> </tr> <tr> <td>vs. Load</td> <td colspan="2">±1.0 ppm max/ year</td> </tr> <tr> <td>vs. Aging</td> <td colspan="2"></td> </tr> </table>		Frequency Stability	±0.5 ppm to ±5.0ppm		vs. Temperature	±0.1 / ±0.2 ppm max / Vdd ± 5%		vs. Supply Voltage	±0.2 ppm max / 15pF ±10%		vs. Load	±1.0 ppm max/ year		vs. Aging																																		
Frequency Stability	±0.5 ppm to ±5.0ppm																																																
vs. Temperature	±0.1 / ±0.2 ppm max / Vdd ± 5%																																																
vs. Supply Voltage	±0.2 ppm max / 15pF ±10%																																																
vs. Load	±1.0 ppm max/ year																																																
vs. Aging																																																	
	<table border="1"> <tr> <td>Temperature Range</td> <td colspan="2">See Table 2</td> </tr> <tr> <td>Operating</td> <td colspan="2">-55°C to 125°C</td> </tr> <tr> <td>Storage</td> <td colspan="2"></td> </tr> </table>		Temperature Range	See Table 2		Operating	-55°C to 125°C		Storage																																								
Temperature Range	See Table 2																																																
Operating	-55°C to 125°C																																																
Storage																																																	
	<table border="1"> <tr> <td>Supply Voltage</td> <td colspan="2">3.3V ± 5%</td> </tr> <tr> <td></td> <td colspan="2">5.0V ± 5%</td> </tr> </table>		Supply Voltage	3.3V ± 5%			5.0V ± 5%																																										
Supply Voltage	3.3V ± 5%																																																
	5.0V ± 5%																																																
	<table border="1"> <tr> <td>Input Current</td> <td colspan="2"></td> </tr> <tr> <td>Sinewave</td> <td>6.00MHz</td> <td>~ 190.000MHz</td> </tr> <tr> <td></td> <td>12.0mA max</td> <td>~ 30mA max</td> </tr> </table>		Input Current			Sinewave	6.00MHz	~ 190.000MHz		12.0mA max	~ 30mA max																																						
Input Current																																																	
Sinewave	6.00MHz	~ 190.000MHz																																															
	12.0mA max	~ 30mA max																																															
	<table border="1"> <tr> <td>Output characteristics</td> <td>Level</td> <td>3.3V</td> <td>Sinewave</td> <td>0 dBm typ</td> </tr> <tr> <td></td> <td></td> <td>5.0V</td> <td></td> <td>10 dBm typ</td> </tr> <tr> <td></td> <td>Load</td> <td></td> <td></td> <td>50Ω</td> </tr> </table>		Output characteristics	Level	3.3V	Sinewave	0 dBm typ			5.0V		10 dBm typ		Load			50Ω																																
Output characteristics	Level	3.3V	Sinewave	0 dBm typ																																													
		5.0V		10 dBm typ																																													
	Load			50Ω																																													
	<table border="1"> <tr> <td>Phase Noise (typical)</td> <td colspan="3">-80 dBc / Hz @ 10Hz</td> </tr> <tr> <td>20MHz offset</td> <td colspan="3">-120 dBc / Hz @ 100Hz</td> </tr> <tr> <td></td> <td colspan="3">-135 dBc / Hz @ 1KHz</td> </tr> <tr> <td></td> <td colspan="3">-140 dBc / Hz @ 10KHz</td> </tr> <tr> <td></td> <td colspan="3">-145 dBc / Hz @100KHz</td> </tr> </table>		Phase Noise (typical)	-80 dBc / Hz @ 10Hz			20MHz offset	-120 dBc / Hz @ 100Hz				-135 dBc / Hz @ 1KHz				-140 dBc / Hz @ 10KHz				-145 dBc / Hz @100KHz																													
Phase Noise (typical)	-80 dBc / Hz @ 10Hz																																																
20MHz offset	-120 dBc / Hz @ 100Hz																																																
	-135 dBc / Hz @ 1KHz																																																
	-140 dBc / Hz @ 10KHz																																																
	-145 dBc / Hz @100KHz																																																
	<table border="1"> <tr> <td>Frequency Adjustment</td> <td colspan="3">±3ppm min by internal trimmer</td> </tr> </table>		Frequency Adjustment	±3ppm min by internal trimmer																																													
Frequency Adjustment	±3ppm min by internal trimmer																																																
ENVIROMENTAL & MECHANICAL SPECIFICATION																																																	
<p>Shock</p> <p>Vibration</p> <p>Solderability</p> <p>Seal integrity</p> <p>Marking</p>	<p>MIL-STD-883C, Method 2002, Condition B</p> <p>MIL-STD-883C, Method 2007, Condition A</p> <p>MIL-STD-883C, Method 2003</p> <p>MIL-STD-883C, Method 1014, Condition C & A2</p> <p>MIL-STD-202F, Method 215</p>																																																
TEST CIRCUIT	TABLE1	TABLE2																																															
	<table border="1"> <thead> <tr> <th>Symbol</th> <th>Stability</th> </tr> </thead> <tbody> <tr><td>05</td><td>±0.5ppm</td></tr> <tr><td>10</td><td>±1.0ppm</td></tr> <tr><td>15</td><td>±1.5ppm</td></tr> <tr><td>20</td><td>±2.0ppm</td></tr> <tr><td>25</td><td>±2.5ppm</td></tr> <tr><td>30</td><td>±3.0ppm</td></tr> <tr><td>35</td><td>±3.5ppm</td></tr> <tr><td>50</td><td>±5.0ppm</td></tr> </tbody> </table>	Symbol	Stability	05	±0.5ppm	10	±1.0ppm	15	±1.5ppm	20	±2.0ppm	25	±2.5ppm	30	±3.0ppm	35	±3.5ppm	50	±5.0ppm	<table border="1"> <thead> <tr> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> </thead> <tbody> <tr><td>0</td><td>0°C</td><td>A</td><td>50°C</td></tr> <tr><td>1</td><td>-10°C</td><td>B</td><td>60°C</td></tr> <tr><td>2</td><td>-20°C</td><td>C</td><td>70°C</td></tr> <tr><td>3</td><td>-30°C</td><td>D</td><td>75°C</td></tr> <tr><td>4</td><td>-40°C</td><td>E</td><td>80°C</td></tr> <tr><td></td><td></td><td>F</td><td>85°C</td></tr> </tbody> </table>		Symbol	Temp.	Symbol	Temp.	0	0°C	A	50°C	1	-10°C	B	60°C	2	-20°C	C	70°C	3	-30°C	D	75°C	4	-40°C	E	80°C			F	85°C
Symbol	Stability																																																
05	±0.5ppm																																																
10	±1.0ppm																																																
15	±1.5ppm																																																
20	±2.0ppm																																																
25	±2.5ppm																																																
30	±3.0ppm																																																
35	±3.5ppm																																																
50	±5.0ppm																																																
Symbol	Temp.	Symbol	Temp.																																														
0	0°C	A	50°C																																														
1	-10°C	B	60°C																																														
2	-20°C	C	70°C																																														
3	-30°C	D	75°C																																														
4	-40°C	E	80°C																																														
		F	85°C																																														