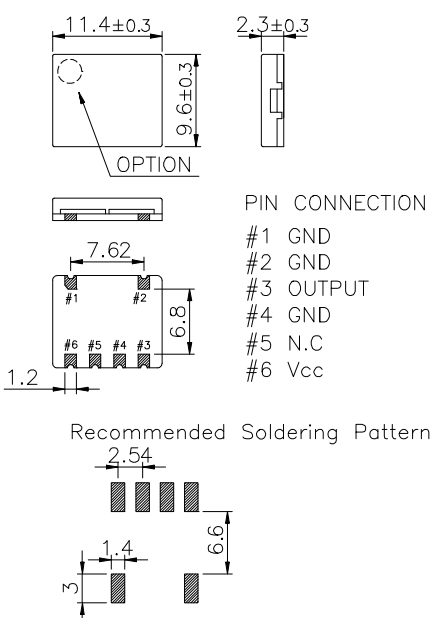
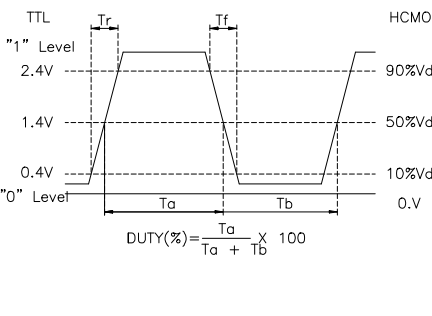
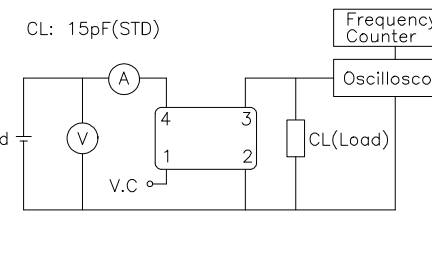


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																	
 <p>PIN CONNECTION</p> <ul style="list-style-type: none"> <li>#1 GND</li> <li>#2 GND</li> <li>#3 OUTPUT</li> <li>#4 GND</li> <li>#5 N.C</li> <li>#6 Vcc</li> </ul> <p>Recommended Soldering Pattern</p>	<table border="1"> <tr> <td>Frequency range</td> <td colspan="3">1.000KHz to 800.000MHz</td> </tr> <tr> <td>Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging</td> <td colspan="3">All combination of Frequency range Vs. Package type might not be available ,please contact factory.</td> </tr> <tr> <td>Temperature Range Operating Storage</td> <td colspan="3">See Table 2 -55°C to 125°C</td> </tr> <tr> <td>Supply Voltage</td> <td colspan="3">3.3V ± 5% 5.0V ± 5%</td> </tr> <tr> <td>Input Current 3.3 V , 5V</td> <td>1.000KHz ~ 15mA max</td> <td>40.000MHz ~ 30mA max</td> <td>800.000MHz ~ 100mA max</td> </tr> <tr> <td>Output characteristics</td> <td>                     HCMOS                      Logic "1" 90% Vdd min                      Logic "0" 10% Vdd max                      Load 15pF                      Duty Cycle 40/60                      Rise &amp; Fall 10nS max                 </td> <td>                     TTL                      2.4V min                      0.4V min                      10TTL                      40/60                      10nS max                 </td> <td></td> </tr> <tr> <td>Phase Noise (typical) 20MHz offset</td> <td colspan="3">                     -80 dBc / Hz @ 10Hz                      -120 dBc / Hz @ 100Hz                      -135 dBc / Hz @ 1KHz                      -140 dBc / Hz @ 10KHz                      -145 dBc / Hz @100KHz                 </td> </tr> <tr> <td>Frequency Adjustment</td> <td colspan="3">±3ppm min by internal trimmer (OPTION)</td> </tr> </table>				Frequency range	1.000KHz to 800.000MHz			Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging	All combination of Frequency range Vs. Package type might not be available ,please contact factory.			Temperature Range Operating Storage	See Table 2 -55°C to 125°C			Supply Voltage	3.3V ± 5% 5.0V ± 5%			Input Current 3.3 V , 5V	1.000KHz ~ 15mA max	40.000MHz ~ 30mA max	800.000MHz ~ 100mA max	Output characteristics	HCMOS Logic "1" 90% Vdd min Logic "0" 10% Vdd max Load 15pF Duty Cycle 40/60 Rise & Fall 10nS max	TTL 2.4V min 0.4V min 10TTL 40/60 10nS max		Phase Noise (typical) 20MHz offset	-80 dBc / Hz @ 10Hz -120 dBc / Hz @ 100Hz -135 dBc / Hz @ 1KHz -140 dBc / Hz @ 10KHz -145 dBc / Hz @100KHz			Frequency Adjustment	±3ppm min by internal trimmer (OPTION)																
Frequency range	1.000KHz to 800.000MHz																																																	
Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging	All combination of Frequency range Vs. Package type might not be available ,please contact factory.																																																	
Temperature Range Operating Storage	See Table 2 -55°C to 125°C																																																	
Supply Voltage	3.3V ± 5% 5.0V ± 5%																																																	
Input Current 3.3 V , 5V	1.000KHz ~ 15mA max	40.000MHz ~ 30mA max	800.000MHz ~ 100mA max																																															
Output characteristics	HCMOS Logic "1" 90% Vdd min Logic "0" 10% Vdd max Load 15pF Duty Cycle 40/60 Rise & Fall 10nS max	TTL 2.4V min 0.4V min 10TTL 40/60 10nS max																																																
Phase Noise (typical) 20MHz offset	-80 dBc / Hz @ 10Hz -120 dBc / Hz @ 100Hz -135 dBc / Hz @ 1KHz -140 dBc / Hz @ 10KHz -145 dBc / Hz @100KHz																																																	
Frequency Adjustment	±3ppm min by internal trimmer (OPTION)																																																	
<h3>OUTPUT WAVEFORM</h3> 	<h3>ENVIROMENTAL &amp; MECHANICAL SPECIFICATION</h3> <table border="1"> <tr> <td>Shock</td> <td>MIL-STD-883C, Method 2002, Condition B</td> </tr> <tr> <td>Vibration</td> <td>MIL-STD-883C, Method 2007, Condition A</td> </tr> <tr> <td>Solderability</td> <td>MIL-STD-883C, Method 2003</td> </tr> <tr> <td>Seal integrity</td> <td>MIL-STD-883C, Method 1014, Condition C &amp; A2</td> </tr> <tr> <td>Marking</td> <td>MIL-STD-202F, Method 215</td> </tr> </table>				Shock	MIL-STD-883C, Method 2002, Condition B	Vibration	MIL-STD-883C, Method 2007, Condition A	Solderability	MIL-STD-883C, Method 2003	Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2	Marking	MIL-STD-202F, Method 215																																				
Shock	MIL-STD-883C, Method 2002, Condition B																																																	
Vibration	MIL-STD-883C, Method 2007, Condition A																																																	
Solderability	MIL-STD-883C, Method 2003																																																	
Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2																																																	
Marking	MIL-STD-202F, Method 215																																																	
<h3>TEST CIRCUIT</h3> 	<h3>TABLE1</h3> <table border="1"> <thead> <tr> <th>Symbol</th> <th>Stability</th> </tr> </thead> <tbody> <tr><td>05</td><td>±0.5ppm</td></tr> <tr><td>10</td><td>±1.0ppm</td></tr> <tr><td>15</td><td>±1.5ppm</td></tr> <tr><td>20</td><td>±2.0ppm</td></tr> <tr><td>25</td><td>±2.5ppm</td></tr> <tr><td>30</td><td>±3.0ppm</td></tr> <tr><td>35</td><td>±3.5ppm</td></tr> <tr><td>50</td><td>±5.0ppm</td></tr> </tbody> </table>		Symbol	Stability	05	±0.5ppm	10	±1.0ppm	15	±1.5ppm	20	±2.0ppm	25	±2.5ppm	30	±3.0ppm	35	±3.5ppm	50	±5.0ppm	<h3>TABLE2</h3> <table border="1"> <thead> <tr> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> </thead> <tbody> <tr><td>0</td><td>0°C</td><td>A</td><td>50°C</td></tr> <tr><td>1</td><td>-10°C</td><td>B</td><td>60°C</td></tr> <tr><td>2</td><td>-20°C</td><td>C</td><td>70°C</td></tr> <tr><td>3</td><td>-30°C</td><td>D</td><td>75°C</td></tr> <tr><td>4</td><td>-40°C</td><td>E</td><td>80°C</td></tr> <tr><td></td><td></td><td>F</td><td>85°C</td></tr> </tbody> </table>		Symbol	Temp.	Symbol	Temp.	0	0°C	A	50°C	1	-10°C	B	60°C	2	-20°C	C	70°C	3	-30°C	D	75°C	4	-40°C	E	80°C			F	85°C
Symbol	Stability																																																	
05	±0.5ppm																																																	
10	±1.0ppm																																																	
15	±1.5ppm																																																	
20	±2.0ppm																																																	
25	±2.5ppm																																																	
30	±3.0ppm																																																	
35	±3.5ppm																																																	
50	±5.0ppm																																																	
Symbol	Temp.	Symbol	Temp.																																															
0	0°C	A	50°C																																															
1	-10°C	B	60°C																																															
2	-20°C	C	70°C																																															
3	-30°C	D	75°C																																															
4	-40°C	E	80°C																																															
		F	85°C																																															