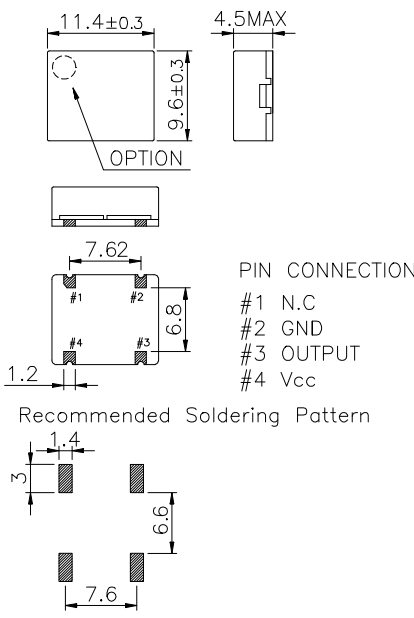
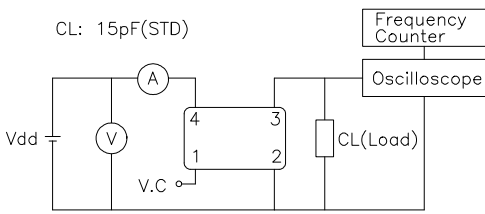


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																
 <p>PIN CONNECTION</p> <ul style="list-style-type: none"> <li>#1 N.C</li> <li>#2 GND</li> <li>#3 OUTPUT</li> <li>#4 Vcc</li> </ul> <p>Recommended Soldering Pattern</p>	<table border="1"> <tr> <td>Frequency range</td> <td colspan="3">1.000KHz to 800.000MHz</td> </tr> <tr> <td></td> <td colspan="3">All combination of Frequency range Vs. Package type might not be available ,please contact factory.</td> </tr> </table>				Frequency range	1.000KHz to 800.000MHz				All combination of Frequency range Vs. Package type might not be available ,please contact factory.																																							
Frequency range	1.000KHz to 800.000MHz																																																
	All combination of Frequency range Vs. Package type might not be available ,please contact factory.																																																
	<table border="1"> <tr> <td>Frequency Stability</td> <td colspan="3">±1.0 ppm to ±5.0ppm</td> </tr> <tr> <td>vs. Temperature</td> <td colspan="3">±0.2 ppm max / Vdd ± 5%</td> </tr> <tr> <td>vs. Supply Voltage</td> <td colspan="3">±0.2 ppm max /15pF ±10%</td> </tr> <tr> <td>vs. Load</td> <td colspan="3">±1.0 ppm max/ year</td> </tr> <tr> <td>vs. Aging</td> <td colspan="3"></td> </tr> </table>				Frequency Stability	±1.0 ppm to ±5.0ppm			vs. Temperature	±0.2 ppm max / Vdd ± 5%			vs. Supply Voltage	±0.2 ppm max /15pF ±10%			vs. Load	±1.0 ppm max/ year			vs. Aging																												
Frequency Stability	±1.0 ppm to ±5.0ppm																																																
vs. Temperature	±0.2 ppm max / Vdd ± 5%																																																
vs. Supply Voltage	±0.2 ppm max /15pF ±10%																																																
vs. Load	±1.0 ppm max/ year																																																
vs. Aging																																																	
	<table border="1"> <tr> <td>Temperature Range</td> <td colspan="3">See Table 2</td> </tr> <tr> <td>Operating</td> <td colspan="3">-55°C to 125°C</td> </tr> <tr> <td>Storage</td> <td colspan="3"></td> </tr> </table>				Temperature Range	See Table 2			Operating	-55°C to 125°C			Storage																																				
Temperature Range	See Table 2																																																
Operating	-55°C to 125°C																																																
Storage																																																	
	<table border="1"> <tr> <td>Supply Voltage</td> <td colspan="3">3.3V ± 5%</td> </tr> <tr> <td></td> <td colspan="3">5.0V ± 5%</td> </tr> </table>				Supply Voltage	3.3V ± 5%				5.0V ± 5%																																							
Supply Voltage	3.3V ± 5%																																																
	5.0V ± 5%																																																
	<table border="1"> <tr> <td>Input Current</td> <td>1.000KHz ~</td> <td>40.000MHz ~</td> <td>800.000MHz</td> </tr> <tr> <td>3.3 V , 5V</td> <td>15mA max</td> <td>30mA max</td> <td>50mA max</td> </tr> </table>				Input Current	1.000KHz ~	40.000MHz ~	800.000MHz	3.3 V , 5V	15mA max	30mA max	50mA max																																					
Input Current	1.000KHz ~	40.000MHz ~	800.000MHz																																														
3.3 V , 5V	15mA max	30mA max	50mA max																																														
	<table border="1"> <tr> <td rowspan="6">Output characteristics</td> <td></td> <td>HCMOS</td> <td>TTL</td> </tr> <tr> <td>Logic "1"</td> <td>90% Vdd min</td> <td>2.4V min</td> </tr> <tr> <td>Logic "0"</td> <td>10% Vdd max</td> <td>0.4V min</td> </tr> <tr> <td>Load</td> <td>15pF</td> <td>10TTL</td> </tr> <tr> <td>Duty Cycle</td> <td>40/60</td> <td>40/60</td> </tr> <tr> <td>Rise &amp; Fall</td> <td>10nS max</td> <td>10nS max</td> </tr> </table>				Output characteristics		HCMOS	TTL	Logic "1"	90% Vdd min	2.4V min	Logic "0"	10% Vdd max	0.4V min	Load	15pF	10TTL	Duty Cycle	40/60	40/60	Rise & Fall	10nS max	10nS max																										
Output characteristics		HCMOS	TTL																																														
	Logic "1"	90% Vdd min	2.4V min																																														
	Logic "0"	10% Vdd max	0.4V min																																														
	Load	15pF	10TTL																																														
	Duty Cycle	40/60	40/60																																														
	Rise & Fall	10nS max	10nS max																																														
	<table border="1"> <tr> <td rowspan="5">Phase Noise (typical) 20MHz offset</td> <td colspan="3">-80 dBc / Hz @ 10Hz</td> </tr> <tr> <td colspan="3">-120 dBc / Hz @ 100Hz</td> </tr> <tr> <td colspan="3">-135 dBc / Hz @ 1KHz</td> </tr> <tr> <td colspan="3">-140 dBc / Hz @ 10KHz</td> </tr> <tr> <td colspan="3">-145 dBc / Hz @100KHz</td> </tr> </table>				Phase Noise (typical) 20MHz offset	-80 dBc / Hz @ 10Hz			-120 dBc / Hz @ 100Hz			-135 dBc / Hz @ 1KHz			-140 dBc / Hz @ 10KHz			-145 dBc / Hz @100KHz																															
Phase Noise (typical) 20MHz offset	-80 dBc / Hz @ 10Hz																																																
	-120 dBc / Hz @ 100Hz																																																
	-135 dBc / Hz @ 1KHz																																																
	-140 dBc / Hz @ 10KHz																																																
	-145 dBc / Hz @100KHz																																																
	<table border="1"> <tr> <td>Frequency Adjustment</td> <td colspan="3">±3ppm min by internal trimmer (OPTION)</td> </tr> </table>				Frequency Adjustment	±3ppm min by internal trimmer (OPTION)																																											
Frequency Adjustment	±3ppm min by internal trimmer (OPTION)																																																
ENVIROMENTAL & MECHANICAL SPECIFICATION																																																	
<p>Shock</p> <p>Vibration</p> <p>Solderability</p> <p>Seal integrity</p> <p>Marking</p>	<p>MIL-STD-883C, Method 2002, Condition B</p> <p>MIL-STD-883C, Method 2007, Condition A</p> <p>MIL-STD-883C, Method 2003</p> <p>MIL-STD-883C, Method 1014, Condition C &amp; A2</p> <p>MIL-STD-202F, Method 215</p>																																																
TEST CIRCUIT		TABLE1		TABLE2																																													
 <p>CL: 15pF(STD)</p>		<table border="1"> <tr> <th>Symbol</th> <th>Stability</th> </tr> <tr> <td>05</td> <td>±0.5ppm</td> </tr> <tr> <td>10</td> <td>±1.0ppm</td> </tr> <tr> <td>15</td> <td>±1.5ppm</td> </tr> <tr> <td>20</td> <td>±2.0ppm</td> </tr> <tr> <td>25</td> <td>±2.5ppm</td> </tr> <tr> <td>30</td> <td>±3.0ppm</td> </tr> <tr> <td>35</td> <td>±3.5ppm</td> </tr> <tr> <td>50</td> <td>±5.0ppm</td> </tr> </table>	Symbol	Stability	05	±0.5ppm	10	±1.0ppm	15	±1.5ppm	20	±2.0ppm	25	±2.5ppm	30	±3.0ppm	35	±3.5ppm	50	±5.0ppm	<table border="1"> <tr> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> <tr> <td>0</td> <td>0°C</td> <td>A</td> <td>50°C</td> </tr> <tr> <td>1</td> <td>-10°C</td> <td>B</td> <td>60°C</td> </tr> <tr> <td>2</td> <td>-20°C</td> <td>C</td> <td>70°C</td> </tr> <tr> <td>3</td> <td>-30°C</td> <td>D</td> <td>75°C</td> </tr> <tr> <td>4</td> <td>-40°C</td> <td>E</td> <td>80°C</td> </tr> <tr> <td></td> <td></td> <td>F</td> <td>85°C</td> </tr> </table>	Symbol	Temp.	Symbol	Temp.	0	0°C	A	50°C	1	-10°C	B	60°C	2	-20°C	C	70°C	3	-30°C	D	75°C	4	-40°C	E	80°C			F	85°C
Symbol	Stability																																																
05	±0.5ppm																																																
10	±1.0ppm																																																
15	±1.5ppm																																																
20	±2.0ppm																																																
25	±2.5ppm																																																
30	±3.0ppm																																																
35	±3.5ppm																																																
50	±5.0ppm																																																
Symbol	Temp.	Symbol	Temp.																																														
0	0°C	A	50°C																																														
1	-10°C	B	60°C																																														
2	-20°C	C	70°C																																														
3	-30°C	D	75°C																																														
4	-40°C	E	80°C																																														
		F	85°C																																														