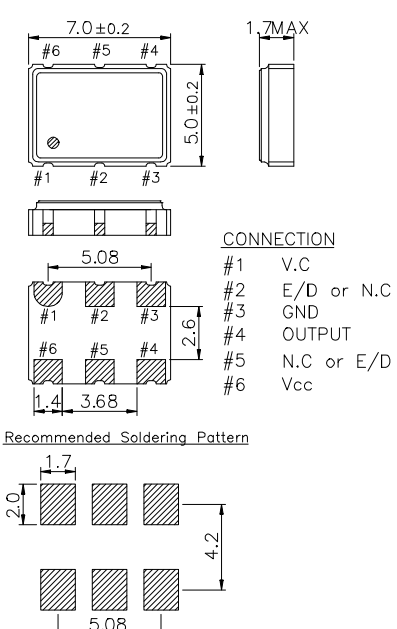

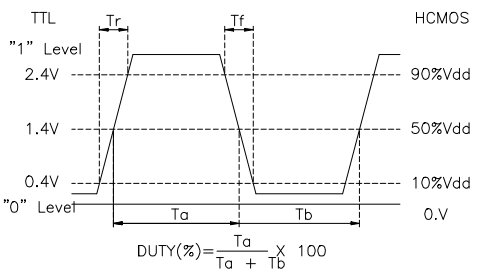


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																	
 <p>CONNECTION</p> <ul style="list-style-type: none"> #1 V.C #2 E/D or N.C #3 GND #4 OUTPUT #5 N.C or E/D #6 Vcc <p>Recommended Soldering Pattern</p> 	<p>Frequency range 1.000MHz to 300.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory</p>																																																	
<p>Frequency Stability vs. Temperature vs. Aging</p>	<p>± 10 ppm to ±50ppm ±3.0 ppm max/ year</p>																																																	
<p>Temperature Range Operating Storage</p>	<p>See Table 2 -55°C to 105°C</p>																																																	
<p>Supply Voltage</p>	<p>3.3V ± 5% 5.0V ± 5%</p>																																																	
<p>Input Current</p>	<table border="1"> <tr> <td></td> <td>3.3V</td> <td>5.0V</td> </tr> <tr> <td>fo ≤ 25.000MHz</td> <td>15mA</td> <td>20mA</td> </tr> <tr> <td>fo ≤ 50.000MHz</td> <td>25mA</td> <td>30mA</td> </tr> <tr> <td>fo ≤ 80.000MHz</td> <td>35mA</td> <td>50mA</td> </tr> <tr> <td>fo ≤ 125.000MHz</td> <td>40mA</td> <td>60mA</td> </tr> <tr> <td>fo ≤ 300.000MHz</td> <td>45mA</td> <td>70mA</td> </tr> </table>			3.3V	5.0V	fo ≤ 25.000MHz	15mA	20mA	fo ≤ 50.000MHz	25mA	30mA	fo ≤ 80.000MHz	35mA	50mA	fo ≤ 125.000MHz	40mA	60mA	fo ≤ 300.000MHz	45mA	70mA																														
	3.3V	5.0V																																																
fo ≤ 25.000MHz	15mA	20mA																																																
fo ≤ 50.000MHz	25mA	30mA																																																
fo ≤ 80.000MHz	35mA	50mA																																																
fo ≤ 125.000MHz	40mA	60mA																																																
fo ≤ 300.000MHz	45mA	70mA																																																
<p>Output characteristics HCMOS / TTL</p>	<table border="1"> <tr> <td></td> <td>HCMOS</td> <td>TTL</td> </tr> <tr> <td>Logic "1"</td> <td>90% Vdd min</td> <td>2.4V min</td> </tr> <tr> <td>Logic "0"</td> <td>10% Vdd max</td> <td>0.4V min</td> </tr> <tr> <td>Load</td> <td>15pF</td> <td>10TTL</td> </tr> <tr> <td>Duty Cycle</td> <td>40/60</td> <td>40/60</td> </tr> <tr> <td>Rise & Fall</td> <td>10nS max</td> <td>10nS max</td> </tr> </table>			HCMOS	TTL	Logic "1"	90% Vdd min	2.4V min	Logic "0"	10% Vdd max	0.4V min	Load	15pF	10TTL	Duty Cycle	40/60	40/60	Rise & Fall	10nS max	10nS max																														
	HCMOS	TTL																																																
Logic "1"	90% Vdd min	2.4V min																																																
Logic "0"	10% Vdd max	0.4V min																																																
Load	15pF	10TTL																																																
Duty Cycle	40/60	40/60																																																
Rise & Fall	10nS max	10nS max																																																
<p>Pull Characteristics</p>																																																		
<p>OUTPUT WAVEFORM</p>	<p>Pulling Range ±50ppm / ±100 / ±150 ppm min</p> <p>Control Range 1.65V ± 1.5V (Vdd : 3.3V) 2.5V ± 2.5V (Vdd : 5.0V)</p>																																																	
	<p>ENVIROMENTAL & MECHANICAL SPECIFICATION</p> <p>Shock MIL-STD-883C, Method 2002, Condition B</p> <p>Vibration MIL-STD-883C, Method 2007, Condition A</p> <p>Solderability MIL-STD-883C, Method 2003</p> <p>Seal integrity MIL-STD-883C, Method 1014, Condition C & A2</p> <p>Marking MIL-STD-202F, Method 215</p>																																																	
<p>TEST CIRCUIT</p>	<table border="1"> <thead> <tr> <th colspan="2">TABLE1</th> <th colspan="4">TABLE2</th> </tr> <tr> <th>Symbol</th> <th>Stability</th> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>± 10ppm</td> <td>0</td> <td>0°C</td> <td>A</td> <td>50°C</td> </tr> <tr> <td>15</td> <td>± 15ppm</td> <td>1</td> <td>-10°C</td> <td>B</td> <td>60°C</td> </tr> <tr> <td>20</td> <td>± 20ppm</td> <td>2</td> <td>-20°C</td> <td>C</td> <td>70°C</td> </tr> <tr> <td>30</td> <td>± 30ppm</td> <td>3</td> <td>-30°C</td> <td>D</td> <td>75°C</td> </tr> <tr> <td>50</td> <td>± 50ppm</td> <td>4</td> <td>-40°C</td> <td>E</td> <td>80°C</td> </tr> <tr> <td>100</td> <td>±100ppm</td> <td></td> <td></td> <td>F</td> <td>85°C</td> </tr> </tbody> </table>		TABLE1		TABLE2				Symbol	Stability	Symbol	Temp.	Symbol	Temp.	10	± 10ppm	0	0°C	A	50°C	15	± 15ppm	1	-10°C	B	60°C	20	± 20ppm	2	-20°C	C	70°C	30	± 30ppm	3	-30°C	D	75°C	50	± 50ppm	4	-40°C	E	80°C	100	±100ppm			F	85°C
TABLE1		TABLE2																																																
Symbol	Stability	Symbol	Temp.	Symbol	Temp.																																													
10	± 10ppm	0	0°C	A	50°C																																													
15	± 15ppm	1	-10°C	B	60°C																																													
20	± 20ppm	2	-20°C	C	70°C																																													
30	± 30ppm	3	-30°C	D	75°C																																													
50	± 50ppm	4	-40°C	E	80°C																																													
100	±100ppm			F	85°C																																													
