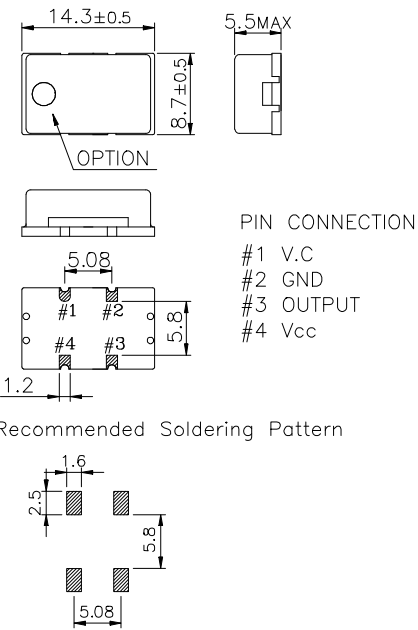
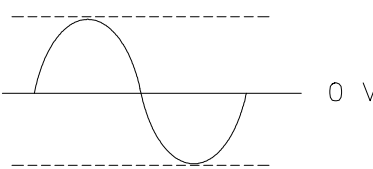
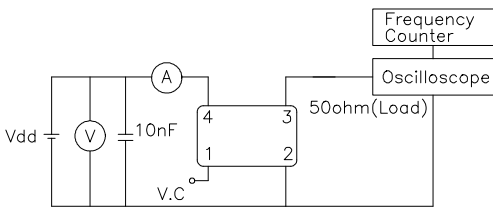


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																																									
 <p>PIN CONNECTION</p> <ul style="list-style-type: none"> <li>#1 V.C</li> <li>#2 GND</li> <li>#3 OUTPUT</li> <li>#4 Vcc</li> </ul> <p>Recommended Soldering Pattern</p>	<table border="1"> <tr> <td>Frequency range</td> <td colspan="2">1.000KHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory</td> </tr> <tr> <td>Frequency Stability vs. Temperature vs. Aging</td> <td colspan="2">± 10 ppm to ±50ppm ±3.0 ppm max/ year</td> </tr> <tr> <td>Temperature Range Operating Storage</td> <td colspan="2">See Table 2 -55°C to 105°C</td> </tr> <tr> <td>Supply Voltage</td> <td colspan="2">3.3V ± 5% 5.0V ± 5%</td> </tr> <tr> <td>Input Current 3.3 V , 5V</td> <td>1.000KHz ~ 40.000MHz ~ 800.000MHz</td> <td>15mA max ~ 30mA max ~ 100mA max</td> </tr> <tr> <td>Output characteristics HCMOS / TTL</td> <td> <table border="1"> <tr> <td></td> <td>HCMOS</td> <td>TTL</td> </tr> <tr> <td>Logic "1"</td> <td>90% Vdd min</td> <td>2.4V min</td> </tr> <tr> <td>Logic "0"</td> <td>10% Vdd max</td> <td>0.4V min</td> </tr> <tr> <td>Load</td> <td>15pF</td> <td>10TTL</td> </tr> <tr> <td>Duty Cycle</td> <td>40/60</td> <td>40/60</td> </tr> <tr> <td>Rise &amp; Fall</td> <td>10nS max</td> <td>10nS max</td> </tr> </table> </td> <td></td> </tr> </table>		Frequency range	1.000KHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory		Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year		Temperature Range Operating Storage	See Table 2 -55°C to 105°C		Supply Voltage	3.3V ± 5% 5.0V ± 5%		Input Current 3.3 V , 5V	1.000KHz ~ 40.000MHz ~ 800.000MHz	15mA max ~ 30mA max ~ 100mA max	Output characteristics HCMOS / TTL	<table border="1"> <tr> <td></td> <td>HCMOS</td> <td>TTL</td> </tr> <tr> <td>Logic "1"</td> <td>90% Vdd min</td> <td>2.4V min</td> </tr> <tr> <td>Logic "0"</td> <td>10% Vdd max</td> <td>0.4V min</td> </tr> <tr> <td>Load</td> <td>15pF</td> <td>10TTL</td> </tr> <tr> <td>Duty Cycle</td> <td>40/60</td> <td>40/60</td> </tr> <tr> <td>Rise &amp; Fall</td> <td>10nS max</td> <td>10nS max</td> </tr> </table>		HCMOS	TTL	Logic "1"	90% Vdd min	2.4V min	Logic "0"	10% Vdd max	0.4V min	Load	15pF	10TTL	Duty Cycle	40/60	40/60	Rise & Fall	10nS max	10nS max																																					
Frequency range	1.000KHz to 800.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory																																																																									
Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year																																																																									
Temperature Range Operating Storage	See Table 2 -55°C to 105°C																																																																									
Supply Voltage	3.3V ± 5% 5.0V ± 5%																																																																									
Input Current 3.3 V , 5V	1.000KHz ~ 40.000MHz ~ 800.000MHz	15mA max ~ 30mA max ~ 100mA max																																																																								
Output characteristics HCMOS / TTL	<table border="1"> <tr> <td></td> <td>HCMOS</td> <td>TTL</td> </tr> <tr> <td>Logic "1"</td> <td>90% Vdd min</td> <td>2.4V min</td> </tr> <tr> <td>Logic "0"</td> <td>10% Vdd max</td> <td>0.4V min</td> </tr> <tr> <td>Load</td> <td>15pF</td> <td>10TTL</td> </tr> <tr> <td>Duty Cycle</td> <td>40/60</td> <td>40/60</td> </tr> <tr> <td>Rise &amp; Fall</td> <td>10nS max</td> <td>10nS max</td> </tr> </table>		HCMOS	TTL	Logic "1"	90% Vdd min	2.4V min	Logic "0"	10% Vdd max	0.4V min	Load	15pF	10TTL	Duty Cycle	40/60	40/60	Rise & Fall	10nS max	10nS max																																																							
	HCMOS	TTL																																																																								
Logic "1"	90% Vdd min	2.4V min																																																																								
Logic "0"	10% Vdd max	0.4V min																																																																								
Load	15pF	10TTL																																																																								
Duty Cycle	40/60	40/60																																																																								
Rise & Fall	10nS max	10nS max																																																																								
<p><b>OUTPUT WAVEFORM</b></p> 	<table border="1"> <tr> <td colspan="3">Pull Characteristics</td> </tr> <tr> <td>Pulling Range</td> <td colspan="2">±50ppm / ±100 / ±150 ppm min Wide pulling range : contact company</td> </tr> <tr> <td>Control Range</td> <td colspan="2">1.65V ± 1.5V ( Vdd : 3.3V ) 2.5V ± 2.5V ( Vdd : 5.0V )</td> </tr> </table>		Pull Characteristics			Pulling Range	±50ppm / ±100 / ±150 ppm min Wide pulling range : contact company		Control Range	1.65V ± 1.5V ( Vdd : 3.3V ) 2.5V ± 2.5V ( Vdd : 5.0V )																																																																
Pull Characteristics																																																																										
Pulling Range	±50ppm / ±100 / ±150 ppm min Wide pulling range : contact company																																																																									
Control Range	1.65V ± 1.5V ( Vdd : 3.3V ) 2.5V ± 2.5V ( Vdd : 5.0V )																																																																									
<p><b>TEST CIRCUIT</b></p> 	<table border="1"> <thead> <tr> <th colspan="4">ENVIROMENTAL &amp; MECHANICAL SPECIFICATION</th> </tr> </thead> <tbody> <tr> <td>Shock</td> <td colspan="3">MIL-STD-883C, Method 2002, Condition B</td> </tr> <tr> <td>Vibration</td> <td colspan="3">MIL-STD-883C, Method 2007, Condition A</td> </tr> <tr> <td>Solderability</td> <td colspan="3">MIL-STD-883C, Method 2003</td> </tr> <tr> <td>Seal integrity</td> <td colspan="3">MIL-STD-883C, Method 1014, Condition C &amp; A2</td> </tr> <tr> <td>Marking</td> <td colspan="3">MIL-STD-202F, Method 215</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">TABLE1</th> <th colspan="4">TABLE2</th> </tr> <tr> <th>Symbol</th> <th>Stability</th> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>± 10ppm</td> <td>0</td> <td>0°C</td> <td>A</td> <td>50°C</td> </tr> <tr> <td>15</td> <td>± 15ppm</td> <td>1</td> <td>-10°C</td> <td>B</td> <td>60°C</td> </tr> <tr> <td>20</td> <td>± 20ppm</td> <td>2</td> <td>-20°C</td> <td>C</td> <td>70°C</td> </tr> <tr> <td>30</td> <td>± 30ppm</td> <td>3</td> <td>-30°C</td> <td>D</td> <td>75°C</td> </tr> <tr> <td>50</td> <td>± 50ppm</td> <td>4</td> <td>-40°C</td> <td>E</td> <td>80°C</td> </tr> <tr> <td>100</td> <td>±100ppm</td> <td></td> <td></td> <td>F</td> <td>85°C</td> </tr> </tbody> </table>		ENVIROMENTAL & MECHANICAL SPECIFICATION				Shock	MIL-STD-883C, Method 2002, Condition B			Vibration	MIL-STD-883C, Method 2007, Condition A			Solderability	MIL-STD-883C, Method 2003			Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2			Marking	MIL-STD-202F, Method 215			TABLE1		TABLE2				Symbol	Stability	Symbol	Temp.	Symbol	Temp.	10	± 10ppm	0	0°C	A	50°C	15	± 15ppm	1	-10°C	B	60°C	20	± 20ppm	2	-20°C	C	70°C	30	± 30ppm	3	-30°C	D	75°C	50	± 50ppm	4	-40°C	E	80°C	100	±100ppm			F	85°C
ENVIROMENTAL & MECHANICAL SPECIFICATION																																																																										
Shock	MIL-STD-883C, Method 2002, Condition B																																																																									
Vibration	MIL-STD-883C, Method 2007, Condition A																																																																									
Solderability	MIL-STD-883C, Method 2003																																																																									
Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2																																																																									
Marking	MIL-STD-202F, Method 215																																																																									
TABLE1		TABLE2																																																																								
Symbol	Stability	Symbol	Temp.	Symbol	Temp.																																																																					
10	± 10ppm	0	0°C	A	50°C																																																																					
15	± 15ppm	1	-10°C	B	60°C																																																																					
20	± 20ppm	2	-20°C	C	70°C																																																																					
30	± 30ppm	3	-30°C	D	75°C																																																																					
50	± 50ppm	4	-40°C	E	80°C																																																																					
100	±100ppm			F	85°C																																																																					